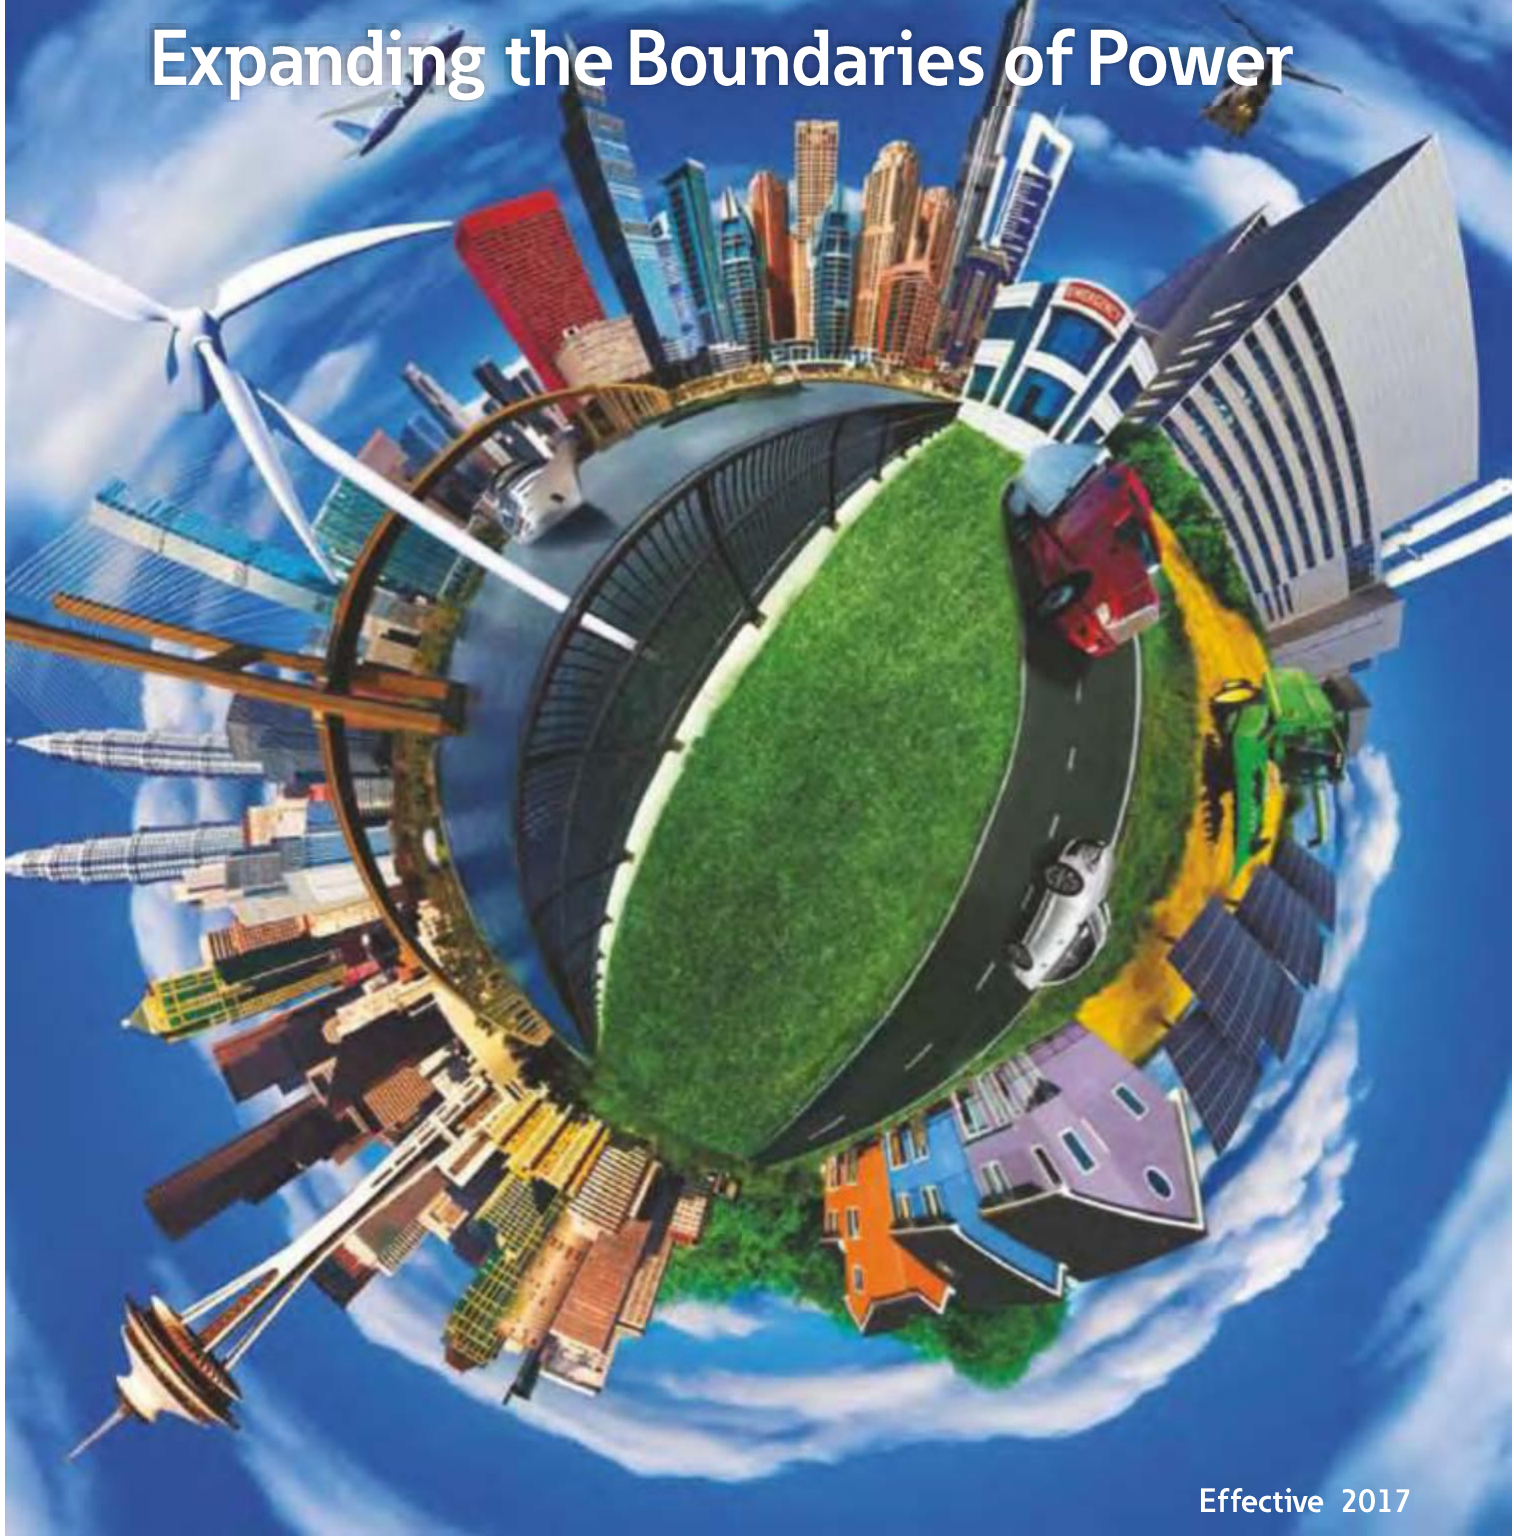


Price List-2017

Fuse and Fuse Base

Expanding the Boundaries of Power



Effective 2017



Powering Business Worldwide



'17

2017 Price List

PRICE LIST EFFECTIVE - 2017

Contents

○ Low Voltage Fuse Links & Fuse Holders	
HRC Fuse Fittings & Bases	1
Low Voltage BS88 Type of Fuse Links	1 - 4
Low Voltage NH Type of Fuse Links	5
○ Highspeed Voltage Fuse Links	
BS 88 Semi-Conductor Protection, Highspeed Fuses	6 - 7
Accessories for BS 88 Highspeed Fuses	8
○ Medium Voltage Fuse Links	
BS Type HV Fuses for use in Air	9 - 10
HV Fuses for use in Oil	11
HV Fuses for use in PT/VT & Auxillary Transformer	11
HV Fuses for use in for HV Motor Circuits	12
○ Fuse Range	
Low Voltage BS88 Type of Fuse Links Range	13 - 16
Highspeed Voltage Fuse Links Range	17
Medium Voltage Fuse Links	18

PRICE :

- For items marked (#), prices available on request.
- Prices are subject to change without prior notice.
- This Price list supersedes all previous Price Lists.
- Price prevailing at the time of dispatch will only be applicable.
- For prices of any special products not listed here, please contact us
- Prices are Ex-Pondicherry, exclusive of packing, forwarding, freight & insurance.
- Company reserves the right to issue amendments which may arise due to any errors in the Price List

TAXES AND DUTIES

- All prices in this document are inclusive of GST.

Order Postponement or cancellation is not allowed.

For all shipments, orders to be in multiples of the carton quantity.

All dimensions in this price list are in millimeters (mm) and all prices are in Rupees (₹) per individual item unless stated otherwise.

Please visit our website at www.eaton.com for further information.

This price list is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products or discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this price list. Once a product has been selected, it should be tested by the user in all possible applications. The information contained in this price list is correct at the time of publication, but we reserve the right to supply products differing in construction or performance.

Price List - 2017

HRC Fuse Fittings & Fuse Bases



Powering Business Worldwide

Fuse Base for LV NH Type of Fuse

IS / BS Size Reference	Description	No. of Poles	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
00 / C00	Fuse Base	Single	160NHG00B/ 100NHG000B	160	SB00-PB	690	270	3	3	O
00 / C00	Top Cover	Single	160NHG00B/ 100NHG000B	160	TC00	690	42	3	3	O
00 / C00	Terminal Shield	Single	160NHG00B/ 100NHG000B	160	IPB00	690	42	6	6	O
00 / C00	Terminal Shield	Single	160NHG00B/ 100NHG000B	160	TS00	690	41	3	3	O




Fuse Fittings for LV BS Type of Fuses

IS / BS Size Reference	Tag Type	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
F1	Clip on	Front (#)	F06/NSD	20	FA20	500	104	10	10	N
		Front	F06/NSD	32	FA32	500	116	10	10	N
		Back	F06/NSD	32	FB32	500	150	10	10	N
		Busbar	F06/NSD	32	FD32	500	130	10	10	N
A2	Offset Bolted	Front	H07/F07/AAO	32	HA32	500	224	5	5	N
		Busbar	H07/F07/AAO	32	HD32	500	275	5	5	N
A3	Offset Bolted	Front	T07/BAO/KO7	63	KA63	500	293	5	5	N
		Busbar	T07/BAO/KO7	63	KD63	500	333	5	5	N
A4	Offset Bolted	Front	L14/KL14/M14	100/125	LA125	500	802	1	1	N
		Busbar	L14/KL14/M14	100/125	LD125	500	821	1	1	N
F1	Clip on	Front	F06/NSD	32	32NNSF	550	122	10	10	N
		Front	ESD	63	63ENSF	415	869	5	5	O

Safelock Range - Screw as wells as DIN Rail fixing (#)

(#) - Available on request - Busbar / Stud Mounting
- In White / Grey Body

Low Voltage BS88 - Clip on Type of Fuses

240 / 550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Breaking Capacity (kA)	Rating (Amps)	Cat. No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	E1	SMALL CLIP ON	240	33	2	SSD2	48	20	20	N
			240	33	4	SSD4	48	20	20	N
			240	33	6	SSD6	48	20	20	N
			240	33	10	SSD10	48	20	20	N
			240	33	16	SSD16	53	20	20	N
			240	33	20	SSD20	53	20	20	N
			240	33	25	SSD25	59	20	20	O
			240	33	32	SSD32	59	20	20	O
	F1	CLIP ON TAG	550	80	2	NSD2	41	20	20	N
			550	80	4	NSD4	41	20	20	N
			550	80	6	NSD6	41	20	20	N
			550	80	10	NSD10	41	20	20	N
			550	80	16	NSD16	49	20	20	N
			550	80	20	NSD20	49	20	20	N
			550	80	25	NSD25	49	20	20	N
			550	80	32	NSD32	49	20	20	N
	F2	LONG CLIP ON	550	80	2	ESD2	68	20	20	O
			550	80	4	ESD4	68	20	20	O
			550	80	6	ESD6	68	20	20	O
			550	80	10	ESD10	68	20	20	O
			550	80	16	ESD16	68	20	20	O
			550	80	20	ESD20	68	20	20	O
			550	80	25	ESD25	72	20	20	O
			550	80	32	ESD32	72	20	20	O
			550	80	40	ESD40	93	20	20	O
			550	80	50	ESD50	93	20	20	N
550	80	63	ESD63	96	20	20	N			

N - Normal; O - On Order

Low Voltage BS88 Type of Fuses

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA

660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFF SET TAG	660 / 690	2	2HO7-660	66	20	20	N	TIA
		CLOSED SLOT	660 / 690	4	4HO7-660	66	20	20	N	
			660 / 690	6	6HO7-660	66	20	20	N	
			660 / 690	10	10HO7-660	78	20	20	N	
			660 / 690	16	16HO7-660	83	20	20	N	
			660 / 690	20	20HO7-660	83	20	20	N	
			660 / 690	25	25HO7-660	83	20	20	N	
			660 / 690	32	32HO7-660	84	20	20	N	
	A3	OFF SET TAG	660 / 690	35	35 KO7-660	142	20	20	N	TIS
		CLOSED SLOT	660 / 690	40	40KO7-660	142	20	20	N	
			660 / 690	50	50KO7-660	142	20	20	N	
			660 / 690	63	63KO7-660	142	20	20	N	
	A4	OFF SET TAG	660 / 690	80	80L14-660	243	10	10	N	TCP
		CLOSED SLOT	660 / 690	100	100L14-660	243	10	10	N	
-	OFF SET TAG	660 / 690	125	125M14-660	429	5	5	N	TFP	
	CLOSED SLOT	660 / 690	160	160M14-660	429	5	5	N		
		660 / 690	200	200M14-660	429	5	5	N		

N - Normal; O - On Order

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA

660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	CENTRE TAG	660 / 690	80	80LO9-660	271	10	10	O	TC
		SINGLE SLOT	660 / 690	100	100LO9-660	271	10	10	N	
	B2	CENTRE TAG	660 / 690	125	125MO9-660	413	5	5	N	TF
		SINGLE SLOT	660 / 690	160	160MO9-660	421	5	5	N	
			660 / 690	200	200MO9-660	426	5	5	N	
	B3	CENTRE TAG	660 / 690	250	250NO9-660	717	1	1	N	TKF
SINGLE SLOT		660 / 690	315	315NO9-660	717	1	1	N		
	C1	CENTRE TAG	660 / 690	355	355P11-660	1202	1	1	O	TMF
		DOUBLE SLOT	660 / 690	400	400P11-660	1213	1	1	O	
	C2	CENTRE TAG	660 / 690	450	450R11-660	1408	1	1	O	TM
		DOUBLE SLOT	660 / 690	500	500R11-660	1408	1	1	O	
		660 / 690	560	560R11-660	1699	1	1	O	TTM	
		660 / 690	630	630R11-660	1699	1	1	O		

N - Normal; O - On Order



Price List - 2017

Low Voltage BS88 Type of Fuses

Bolted Type, 550 Volts range, Breaking Capacity - 80kA




Powering Business Worldwide

550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	-	OFFSET TAG	550	2	NITD2	57	20	20	N	NIT
		OPEN SLOT	550	4	NITD4	57	20	20	N	
			550	6	NITD6	57	20	20	N	
			550	10	NITD10	57	20	20	N	
			550	16	NITD16	57	20	20	N	
			550	20	NITD20	57	20	20	N	
			550	25	NITD25	67	20	20	O	
	550	32	NITD32	67	20	20	O			
	A2	OFFSET TAG	550	2	AAO2	52	20	20	N	TSA
		CLOSED SLOT	550	4	AAO4	52	20	20	O	
			550	6	AAO6	52	20	20	N	
			550	10	AAO10	52	20	20	N	
			550	16	AAO16	52	20	20	N	
			550	20	AAO20	56	20	20	N	
			550	25	AAO25	56	20	20	N	
		550	32	AAO32	56	20	20	N		
	A3	OFFSET TAG	550	35	BAO35	94	20	20	N	TSS
		CLOSED SLOT	550	40	BAO40	94	20	20	N	
		(@)	550	50	BAO50	94	20	20	N	
	-	OFFSET TAG	550	80	OSD80	189	20	20	N	TSDS
		CLOSED SLOT	550	100	OSD100	189	20	20	N	

Note: (@) - KO7 - Open Slot, BAO - Closed Slot
N - Normal; O - On Order

Low Voltage BS88 Type of Fuses

Bolted Type, 550 Volts range, Breaking Capacity - 80kA

550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class		
	C2	CENTRE TAG	550	450	FF450	1058	1	1	O	TST	
		DOUBLE SLOT	550	500	FF500	1058	1	1	O		
			550	560	FF560	1378	1	1	O		
			550	630	FF630	1378	1	1	O		
	C3	CENTRE TAG	550	710	GF710	2197	1	1	O	TLM	
		DOUBLE SLOT	550	800	GF800	2197	1	1	O		
	-	CENTRE TAG		550	710	GG710	#	1	3	O	TLT
				550	800	GG800	#	1	3	O	
		DOUBLE SLOT		550	1000	GG1000	#	1	3	O	
				550	1250	GG1250	#	1	3	O	

- Price Available on request

N - Normal; O - On Order

Low Voltage BS88 Type of Fuses

Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	-	OFFSET TAG	550	2	EITD2	68	20	20	N
		OPEN SLOT	550	4	EITD4	68	20	20	N
			550	6	EITD6	68	20	20	N
			550	10	EITD10	68	20	20	N
			550	16	EITD16	68	20	20	N
			550	20	EITD20	68	20	20	N
			550	25	EITD25	78	20	20	N
			550	32	EITD32	78	20	20	N
			415	40	EITD40	93	20	20	N
			415	50	EITD50	93	20	20	N
		415	63	EITD63	102	20	20	N	
	A4	OFFSET TAG	415	32	CEO32	171	10	10	O
		CLOSED SLOT	415	40	CEO40	171	10	10	O
			415	50	CEO50	171	10	10	O
			415	63	CEO63	171	10	10	O
			415	80	CEO80	171	10	10	N
			415	100	CEO100	171	10	10	N
	-	OFFSET TAG	415	125	DEO125	262	5	5	N
		CLOSED SLOT	415	160	DEO160	262	5	5	N
			415	200	DEO200	262	5	5	O
	B1	CENTRE TAG	415	80	CD80	197	10	10	O
		SINGLE SLOT	415	100	CD100	197	10	10	N
	B2	CENTRE TAG	415	125	DD125	243	5	5	N
		SINGLE SLOT	415	160	DD160	253	5	5	N
			415	200	DD200	253	5	5	N
	B3 / B4	CENTRE TAG	415	250	ED250	388	1	1	N
		SINGLE SLOT							
	B3/B4	CENTRE TAG	415	315	ED315	454	1	1	N
		SINGLE SLOT							
B4	CENTRE TAG	415	355	ED355	685	1	1	O	
	SINGLE SLOT	415	400	ED400	685	1	1	N	

N - Normal; O - On Order

Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	-	CENTRE TAG	415	355	355SN11(S)	730	1	1	O
		SINGLE SLOT	415	400	400SN11(S)	751	1	1	N
	-	CENTRE TAG	415	450	450SP11(S)	857	1	1	O
		SINGLE SLOT	415	500	500SP11(S)	857	1	1	O
	-	CENTRE TAG	415	560	560SR11(S)	1613	1	1	O
		SINGLE SLOT	415	630	630SR11(S)	1764	1	1	N
			415	710	710SR11(S)	-	1	1	O
			415	800	800SR11(S)	1950	1	1	N
	C1	CENTRE TAG	415	355	EF355	896	1	1	O
		DOUBLE SLOT	415	400	EF400	896	1	1	O
	-	CENTRE TAG	415	710	710SR11	2075	1	1	O
		DOUBLE SLOT	415	800	800SR11	2075	1	1	N

N - Normal; O - On Order

500 Vac	Size	Rated Current (A)	Class gL-gG with Dual Indication & Insulated Grips	Unit Price (₹)	Class gL-gG with Dual Indication & Metallic Grips	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class		
	000	2	2NHG000BI	320	2NHG000B	236	3	3	N		
		4	4NHG000BI	320	4NHG000B	236	3	3	N		
		6	6NHG000BI	320	6NHG000B	236	3	3	N		
		10	10NHG000BI	320	10NHG000B	236	3	3	N		
		16	16NHG000BI	320	16NHG000B	236	3	3	N		
		20	20NHG000BI	320	20NHG000B	236	3	3	N		
		25	25NHG000BI	320	25NHG000B	236	3	3	N		
		32	32NHG000BI	320	32NHG000B	236	3	3	N		
		35	35NHG000BI	320	35NHG000B	236	3	3	O		
		40	40NHG000BI	320	40NHG000B	236	3	3	N		
		50	50NHG000BI	320	50NHG000B	236	3	3	N		
		63	63NHG000BI	320	63NHG000B	236	3	3	N		
		80	80NHG000BI	350	80NHG000B	255	3	3	N		
		100	100NHG000BI	350	100NHG000B	255	3	3	O		
			00	125	125NHG00BI	463	125NHG00B	345	3	3	N
				160	160NHG00BI	504	160NHG00B	360	3	3	N
0@	50		-	-	50NHG0B	460	3	3	O		
	63		-	-	63NHG0B	460	3	3	O		
	80		-	-	80NHG0B	460	3	3	O		
	100		-	-	100NHG0B	462	3	3	O		
0s	125	-	-	125NHG0B	462	3	3	O			
	160	-	-	160NHG0B	466	3	3	O			
	200	-	-	200NHG0SB	490	3	3	O			
		01@	100	100NHG01BI	663	100NHG01B	488	3	3	O	
125			125NHG01BI	683	125NHG01B	503	3	3	O		
160			160NHG01BI	695	160NHG01B	512	3	3	O		
1		200	200NHG1BI	701	200NHG1B	517	3	3	N		
		224	224NHG1BI	738	224NHG1B	525	3	3	O		
		250	250NHG1BI	801	250NHG1B	555	3	3	N		
		315#	-	-	315NHG1B#	675	3	3	O		
		35	35NHG02BI	966	35NHG02B	687	3	3	O		
02		40	40NHG02BI	966	40NHG02B	687	3	3	O		
		50	50NHG02BI	966	50NHG02B	687	3	3	O		
	63	63NHG02BI	966	63NHG02B	687	3	3	O			
	80	80NHG02BI	966	80NHG02B	687	3	3	O			
	100	100NHG02BI	966	100NHG02B	687	3	3	O			
	125	125NHG02BI	966	125NHG02B	687	3	3	O			
	160	160NHG02BI	966	160NHG02B	687	3	3	O			
	200	200NHG02BI	1036	200NHG02B	718	3	3	O			
	224	224NHG02BI	1036	224NHG02B	718	3	3	O			
	250	250NHG02BI	1036	250NHG02B	727	3	3	O			
2	315	315NHG2BI	1036	315NHG2B	735	3	3	N			
	355	355NHG2BI	1051	355NHG2B	740	3	3	O			
	400	400NHG2BI	1051	400NHG2B	750	3	3	N			
	250	250NHG03BI	1593	250NHG03B	1143	3	3	O			
	315	315NHG03BI	1593	315NHG03B	1143	3	3	O			
03	355	355NHG03BI	1593	355NHG03B	1143	3	3	O			
	400	400NHG03BI	1593	400NHG03B	1143	3	3	O			
	425	-	-	425NHG3B	1141	3	3	O			
	450	-	-	450NHG3B	1141	3	3	O			
3	500	-	-	500NHG3B	1171	3	3	N			
	630	-	-	630NHG3B	1192	3	3	N			
	800*#	-	-	800NH3GB*#	1878	3	3	N			

@ Size "0", 6A - 63A on request
Size "00" 63A-100A on request

Size "01", 6A - 80A on request
Size "1" 80A-160A on request

* Available in Single Indicator type only
Rated Voltage 440V

N - Normal; O - On Order

HRC High Speed Fuses - Semi Conductor Protection Fuses - BS88 Type

Rated Voltage 240 Volts AC, Breaking Capacity - 200 kA

240 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	240	6	6LCT	149	20	20	N
	240	10	10LCT	149	20	20	N
	240	12	12LCT	149	20	20	O
	240	16	16LCT	149	20	20	N
	240	20	20LCT	149	20	20	N
	240	25	25LET	279	10	10	N
	240	32	32LET	279	10	10	N
	240	35	35LET	279	10	10	O
	240	50	50LET	279	10	10	N
	240	63	63LET	279	10	10	N
	240	80	80LET	287	10	10	N
	240	100	100LET	287	10	10	O
	240	125	125LET	309	10	10	N
	240	160	160LET	353	10	10	N
	240	160	160LMT	506	1	1	N
	240	200	200LMT	506	1	1	N
	240	250	250LMT	662	1	1	N
	240	315	315LMT	986	1	1	N
	240	355	355LMT	986	1	1	N
	240	400	400LMT	986	1	1	N
	240	450	450LMT	1253	1	1	N
	240	400	400LMMT	1427	1	1	O
	240	500	500LMMT	1443	1	1	O
	240	630	630LMMT	1835	1	1	O
	240	710	710LMMT	1921	1	1	O
	240	800	800LMMT	2267	1	1	O
	240	900	900LMMT	2512	1	1	O

N - Normal; O - On Order

Rated Voltage 690 Volts AC, Breaking Capacity - 200 kA

690 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	690	6	6CT	162	20	20	N
	690	10	10CT	162	20	20	N
	690	12	12CT	162	20	20	O
	690	16	16CT	173	20	20	N
	690	20	20CT	173	20	20	N
	690	15	15ET	344	10	10	N
	690	25	25ET	344	10	10	N
	690	32	32ET	344	10	10	N
	690	35	35ET	344	10	10	N
	690	40	40ET	344	10	10	N
	690	45	45ET	344	10	10	N
	690	56	56ET	382	10	10	N
	690	63	63ET	382	10	10	N
	690	80	80ET	382	10	10	N

N - Normal; O - On Order

690 Vac.	Voltage (V)	Rating (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	690	35	35FE	376	10	10	N
	690	40	40FE	376	10	10	O
	690	45	45FE	376	10	10	N
	690	50	50FE	376	10	10	N
	690	63	63FE	405	10	10	N
	690	71	71FE	405	10	10	O
	690	80	80FE	405	10	10	N
	690	90	90FE	556	10	10	N
	690	100	100FE	556	10	10	N
	690	75	75EET	826	5	5	O
	690	90	90EET	826	5	5	N
	690	110	110EET	826	5	5	N
	690	140	140EET	826	5	5	N
	690	160	160EET	834	5	5	N
	690	100	100FEE	870	5	5	N
	690	120	120FEE	961	5	5	N
	690	140	140FEE	994	5	5	N
	690	160	160FEE	994	5	5	N
	690	180	180FEE	994	5	5	O
	690	200	200FEE	994	5	5	N
	690	160	160MT	697	1	1	N
	690	180	180MT	710	1	1	N
	690	200	200MT	938	1	1	N
	690	250	250MT	947	1	1	N
	690	280	280MT	1023	1	1	N
	690	315	315MT	1323	1	1	N
	690	355	355MT	1336	1	1	N
		690	180	180MMT	1370	1	1
690		200	200MMT	1440	1	1	N
690		225	225MMT	1440	1	1	N
690		280	280MMT	1440	1	1	N
690		315	315MMT	1520	1	1	N
690		355	355MMT	1737	1	1	N
690		400	400MMT	1775	1	1	N
690		450	450MMT	1808	1	1	N
690		500	500MMT	1900	1	1	N
690		560	560MMT	2281	1	1	N
690		630	630MMT	2372	1	1	N
	690	180	180FM	766	1	1	O
	690	200	200FM	868	1	1	N
	690	225	225FM	904	1	1	N
	690	250	250FM	904	1	1	N
	690	280	280FM	1002	1	1	O
	690	315	315FM	1367	1	1	N
	690	350	350FM	1367	1	1	N
		690	400	400FMM	1563	1	1
690		450	450FMM	1563	1	1	N
690		500	500FMM	1823	1	1	N
690		550	550FMM	1915	1	1	N
690		630	630FMM	2233	1	1	N
690		700	700FMM	2460	1	1	N

N - Normal; O - On Order

HRC High Speed Fuses - Semi Conductor Protection Fuses - BS88 Type

Accessories

Catalogue No. / Type	Trip Indicator accessory pack (each consists of 1 pair of clip & appropriate size Trip Indicator Fuse Link)	Unit Price (₹)	Pack Quantity	Delivery Class
EC-250	For use with LET	595	1 set	O
EC-600	For use with ET, EET, FE & FEE	631	1 set	O
MC-250	For use with LMT & LMMT	602	1 set	O
MC-600	For use with FM & FMM	633	1 set	O
MC-700	For use with MT & MMT	633	1 set	O

Catalogue No. / Type	Micro - Switch	Unit Price (₹)	Pack Quantity	Delivery Class
MAI	Micro-switch & Adapter assly.	774	1	O
MBI	Micro-switch & Adapter assly.	#	1	O

Catalogue No. / Type	Fuse Clips for Fitting Trip Indicator	Unit Price (₹)	Pack Quantity	Delivery Class
ECLIP	For use with LET, ET, EET, FE & FEE	111	10	O
MCLIP	For use with LMT, LMMT, MT, MMT, FM & FMM	238	10	O
CL1	Back connected Clip for use with Trip Indicator fuse	794	1 set	O

Catalogue No. / Type	Trip Indicators for Fuse Links	Unit Price (₹)	Pack Quantity	Delivery Class
TI250-BT	For use with LET, LMT & LMMT	517	10	O
TI500-BT	For use with ###	517	1	O
TI600-BT	For use with ET, EET, FE & FEE, FM & FMM	523	1	O
TI700-BT	For use with MT & MMT	527	1	O
TI1100-BT	For replacement only	805	1	O
TI1500-BT	For replacement only	828	1	O
TI2000-BT	For replacement only	855	1	O

- Price Available on request
N - Normal; O - On Order

NH Fuse base

Catalogue No. / Type	Trip Indicator accessory pack (each consists of 1 pair of clip & appropriate size Trip Indicator Fuse Link)	Unit Price (₹)	Pack Quantity	Delivery Class
SD1-S	NH FUSE BASE SD1-S	798	3	O
SD2-S	NH FUSE BASE SD2-S	937	3	O
SD3-S	NH FUSE BASE SD3-S	1398	3	O
SD4-S	NH FUSE BASE SD4-S	3824	1	O

N - Normal; O - On Order




	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
		3.3 / 3.6	25	15	3.6ADGHC15	3105	1	1	O
		3.3 / 3.6	25	20	3.6ADGHC20	3105	1	1	O
		3.3 / 3.6	25	25	3.6ADGHC25	3105	1	1	O
		3.3 / 3.6	25	30	3.6ADGHC30	3105	1	1	O
		3.3 / 3.6	25	40	3.6ADGHC40	3105	1	1	O
		3.3 / 3.6	25	45	3.6ADGHC45	3105	1	1	O
		3.3 / 3.6	25	50	3.6ADGHC50	3105	1	1	O
		3.3 / 3.6	25	60	3.6ADGHC60	3105	1	1	O
		3.3 / 3.6	25	70	3.6ADGHC70	3105	1	1	O
		3.3 / 3.6	25	75	3.6ADGHC75	3441	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	10	7.2BDGHC10	3150	1	1	O
		6.6 / 7.2	40	16	7.2BDGHC16	3150	1	1	O
		6.6 / 7.2	40	20	7.2BDGHC20	3150	1	1	O
		6.6 / 7.2	40	25	7.2BDGHC25	3150	1	1	O
		6.6 / 7.2	40	31.5	7.2BDGHC31.5	3150	1	1	O
		6.6 / 7.2	40	35.5	7.2BDGHC35.5	3150	1	1	O
		6.6 / 7.2	40	40	7.2BDGHC40	3150	1	1	O
		6.6 / 7.2	40	45	7.2BDGHC45	3203	1	1	O
		6.6 / 7.2	40	50	7.2BDGHC50	3203	1	1	O
		6.6 / 7.2	40	56	7.2BDGHC56	3203	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	60	7.2AHGHC60	3203	1	1	O
		6.6 / 7.2	40	63	7.2AHGHC63	3407	1	1	O
		6.6 / 7.2	40	71	7.2AHGHC71	3429	1	1	O
		6.6 / 7.2	40	80	7.2AHGHC80	3429	1	1	O
		6.6 / 7.2	40	50	7.2AHGHC50	3845	1	1	O
		6.6 / 7.2	40	60	7.2AHGHC60	3845	1	1	O
		6.6 / 7.2	40	75	7.2AHGHC75	4045	1	1	O
		6.6 / 7.2	40	90	7.2AHGHC90	4275	1	1	O
		6.6 / 7.2	40	100	7.2AHGHC100	4296	1	1	O
		6.6 / 7.2	40	112	7.2AHGHC112	4986	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	125	7.2AHGHC125	5187	1	1	O
		6.6 / 7.2	40	140	7.2AHGHC140	5651	1	1	O
		6.6 / 7.2	40	150	7.2AHGHC150	5651	1	1	O
		6.6 / 7.2	40	160	7.2AHGHC160	5651	1	1	N
		6.6 / 7.2	40	160	7.2AHGNB160 (NS)	5265	1	1	O
		6.6 / 7.2	40	50	7.2AHGHB50	3789	1	1	O
		6.6 / 7.2	40	60	7.2AHGHB60	3789	1	1	O
		6.6 / 7.2	40	65	7.2AHGHB65	3988	1	1	O
		6.6 / 7.2	40	75	7.2AHGHB75	3988	1	1	O
		6.6 / 7.2	40	90	7.2AHGHB90	4220	1	1	N
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	100	7.2AHGHB100	4240	1	1	O
		6.6 / 7.2	40	112	7.2AHGHB112	4923	1	1	O
		6.6 / 7.2	40	120	7.2AHGHB120	5125	1	1	O
		6.6 / 7.2	40	125	7.2AHGHB125	5125	1	1	O
		6.6 / 7.2	40	140	7.2AHGHB140	5595	1	1	O
		6.6 / 7.2	40	150	7.2AHGHB150	5595	1	1	O
		6.6 / 7.2	40	160	7.2AHGHB160	5595	1	1	O
		6.6 / 7.2	20	30	7.2AEFMO30	3869	1	1	O
		6.6 / 7.2	20	35	7.2AEFMO35	3869	1	1	O
		6.6 / 7.2	20	40	7.2AEFMO40	3869	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	20	50	7.2AEFMO50	3902	1	1	O
		6.6 / 7.2	20	56	7.2AEFMO56	3902	1	1	O
		6.6 / 7.2	20	63	7.2AEFMO63	3902	1	1	O
		6.6 / 7.2	20	71	7.2AEFMO71	3927	1	1	O
		6.6 / 7.2	20	80	7.2AEFMO80	3927	1	1	O
		6.6 / 7.2	20	90	7.2AEFMO90	4009	1	1	O

(#) - Available on request N - Normal; O - On Order (NS) - Non striker

For ordering HV Air Fuse with Single Slot9

- 1 - For BD _____ series, add "S" at the end of the cat. number. For ex : For ordering 100A, 7.2BFGHD catalogue no. will be "7.2BFGHD100S"
- 2 - For AH _____ series, replace "C" at end with "B" For ex : For ordering 100A, 7.2AHGH series, catalogue no. will be "7.2AHGHB100"
- 3 - For "7.2BFGHD" _____ series, completely replaced with "7.2AHGHB".

High Voltage Fuses
British Standard Type Range of Fuses for use in Air



	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	Air (Bus Duct / Distribution)	11 / 12	40	6.3	12BDGHC6.3	3626	1	1	O
		11 / 12	40	10	12BDGHC10	3626	1	1	O
		11 / 12	40	16	12BDGHC16	3626	1	1	O
		11 / 12	40	20	12BDGHC20	3655	1	1	O
		11 / 12	40	25	12BDGHC25	3655	1	1	N
		11 / 12	40	31.5	12BDGHC31.5	3655	1	1	O
		11 / 12	40	35.5	12BDGHC35.5	3655	1	1	O
		11 / 12	40	40	12BDGHC40	3682	1	1	O
		11 / 12	40	45	12BDGHC45	3682	1	1	O
	Air (Bus Duct / Distribution)	11 / 12	40	50	12BDGHC50	3682	1	1	O
		11 / 12	40	56	12AHGHC56	3960	1	1	O
		11 / 12	40	63	12AHGHC63	3960	1	1	N
		11 / 12	40	70	12AHGHC70	4016	1	1	O
		11 / 12	40	80	12AHGHC80	4348	1	1	N
		11 / 12	40	90	12AHGHC90	4308	1	1	O
		11 / 12	40	100	12AHGHC100	4348	1	1	O
		11 / 12	40	56	12AHGHB56	3903	1	1	O
		11 / 12	40	63	12AHGHB63	3903	1	1	N
		11 / 12	40	65	12AHGHB65	3960	1	1	O
		11 / 12	40	70	12AHGHB70	3960	1	1	N
	Air (Bus Duct / Distribution)	11 / 12	40	80	12AHGHB80	4292	1	1	O
		11 / 12	40	90	12AHGHB90	4292	1	1	O
		11 / 12	40	100	12AHGHB100	4292	1	1	N
		11 / 12	40	112	12AKGHD112	9943	3	3	O
		11 / 12	40	125	12AKGHD125	10236	1	1	O
		11 / 12	20	3.7	12AEFMO3.7	4050	1	1	O
		11 / 12	20	12	12AEFMO12	4013	1	1	O
		11 / 12	20	15	12AEFMO15	4013	1	1	O
		11 / 12	20	16.8	12AEFMO16.8	4013	1	1	O
		11 / 12	20	22	12AEFMO22	4039	1	1	O
		11 / 12	20	26.6	12AEFMO26.6	4039	1	1	O
11 / 12	20	30	12AEFMO30	4039	1	1	O		
11/12	20	33.75	12AEFMO33.75	4039	1	1	O		
11 / 12	20	37.5	12AEFMO37.5	4039	1	1	O		
11 / 12	20	42	12AEFMO42	4078	1	1	O		
11 / 12	20	47.25	12AEFMO47.25	4078	1	1	O		

(#) - Available on request

N - Normal; O - On Order




 For ordering HV Air Fuse with Single Slot -
 1 - For "12BFGHD" ___ series, completely replaced with "12AHGHB".

For use in Oil

Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	Oil	6.6 / 7.2	45	100	7.2OEFMA100	3571	1	1	O
	Oil	11 / 12	40	6.3	12OEFMA6.3	3775	3	3	O
		11 / 12	40	10	12OEFMA10	3775	3	3	O
		11 / 12	40	16	12OEFMA16	3775	3	3	O
		11 / 12	40	20	12OEFMA20	3783	3	3	O
		11 / 12	40	25	12OEFMA25	3783	3	3	O
		11 / 12	40	31.5	12OEFMA31.5	3783	3	3	O
		11 / 12	40	40	12OEFMA40	3795	3	3	O
		11 / 12	40	50	12OEFMA50	3795	3	3	O
		11 / 12	40	63	12OEFMA63	3795	3	3	O
11 / 12		40	71	12OHFMA71	3919	3	3	O	
11 / 12		40	80	12OHFMA80	3919	3	3	O	
		11 / 12	40	16	12OHGMA16	4607	3	3	O
		11 / 12	40	25	12OHGMA25	4632	3	3	O
		11 / 12	40	31.5	12OHGMA31.5	4632	3	3	O
		11 / 12	40	40	12OHGMA40	4656	3	3	O
		11 / 12	40	50	12OHGMA50	4656	3	3	O
		11 / 12	40	63	12OHGMA63	4656	3	3	O
		11 / 12	40	80	12OHGMA80	4656	3	3	O
		11 / 12	40	90	12OHGMA90	4832	3	3	O
	11 / 12	40	100	12OHGMA100	5282	3	3	O	
	11 / 12	40	125	12OLGMA125	5937	3	3	O	

N - Normal; O - On Order

For use in PT / VT & Auxiliary Transformer

Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNA3.15	807	1	1	N
	VT / PT	3.3 / 3.6	50	6.3	3.6ABWNA6.3	807	1	1	O
		6.6 / 7.2	45	3.15	7.2ABCNA3.15	878	1	1	N
		6.6 / 7.2	45	6.3	7.2ABCNA6.3	878	1	1	O
		6.6 / 7.2	45	3.15	7.2ABWNA3.15	865	1	1	O
		6.6 / 7.2	45	6.3	7.2ABWNA6.3	865	1	1	O
		11 / 12	45	3.15	12ABCNA3.15	889	1	1	N
		22 / 24	25	3.15	24ABGNA3.15	2102	1	1	N
33 / 36	31.5	3.15	36ABQNA 3.15	2998	1	1	N		
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNS3.15	867	1	1	O
	VT / PT	6.6 / 7.2	45	3.15	7.2ABCNS3.15	961	1	1	O
		11 / 12	45	3.15	12ABCNS3.15	1033	1	1	O
	VT / PT	3.3 / 3.6	50	3.15	3.6ABWNT3.15	993	1	1	O
	VT / PT	6.6 / 7.2	45	3.15	7.2ABCNT3.15	907	1	1	O
		11 / 12	45	3.15	12ABCNT3.15	1046	1	1	O

N - Normal; O - On Order

HRC High Voltage Fuses

British Standard Type Range of Fuses for use in Motor Circuits

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	For use in MV Motor Circuits	3.6	50	5	3.6WDOHS5	3648	1	1	O
		3.6	50	16	3.6WDOHS16	3648	1	1	O
		3.6	50	20	3.6WDOHS20	3648	1	1	N
		3.6	50	25	3.6WDOHS25	3648	1	1	O
		3.6	50	32	3.6WDOHS32	3616	1	1	N
		3.6	50	40	3.6WDOHS40	3616	1	1	O
		3.6	50	50	3.6WDOHS50	3616	1	1	O
		3.6	50	63	3.6WDOHS63	3616	1	1	N
		3.6	50	80	3.6WDOHS80	3616	1	1	O
		3.6	50	50	3.6WDFMO50	5033	1	1	O
		3.6	50	63	3.6WDFMO63	5033	1	1	O
		3.6	50	80	3.6WDFMO80	5033	1	1	O
		3.6	50	100	3.6WDFMO100	5033	1	1	O
		3.6	50	100	3.6WFFMO100	6255	1	1	O
		3.6	50	140	3.6WFFMO140	6973	1	1	O
		3.6	50	160	3.6WFFMO160	6973	1	1	O
		3.6	50	200	3.6WFFMO200	7561	1	1	N
		3.6	50	250	3.6WFFMO250	8565	1	1	O
		3.6	50	315	3.6WFFMO315	9895	1	1	O
		3.6	50	350	3.6WFFMO350	10952	1	1	O
3.6	50	450	3.6WFFMO450	16464	1	1	O		
3.6	50	630	3.6WKQMO630	21109	1	1	O		
	For use in MV Motor Circuits	7.2	45	50	7.2WFNMO50	6985	1	1	O
		7.2	45	63	7.2WFNMO63	6985	1	1	O
		7.2	45	80	7.2WFNMO80	8104	1	1	O
		7.2	45	100	7.2WFNMO100	8104	1	1	O
		7.2	45	125	7.2WFNMO125	9373	1	1	O
		7.2	45	160	7.2WFNMO160	9373	1	1	O
		7.2	45	200	7.2WFNMO200	10730	1	1	O
		7.2	45	250	7.2WFNMO250	12466	1	1	O
		7.2	45	50	7.2WFQMO50	7688	1	1	N
		7.2	45	63	7.2WFQMO63	7688	1	1	N
		7.2	45	80	7.2WFQMO80	8438	1	1	N
		7.2	45	100	7.2WFQMO100	8877	1	1	N
		7.2	45	125	7.2WFQMO125	10260	1	1	N
		7.2	45	160	7.2WFQMO160	10260	1	1	O
		7.2	45	200	7.2WFQMO200	11578	1	1	O
		7.2	45	250	7.2WFQMO250	14335	1	1	O
		7.2	45	350	7.2WKQMO350	19357	1	1	O
		7.2	45	400	7.2WKQMO400	32621	1	1	O

N - Normal; O - On Order

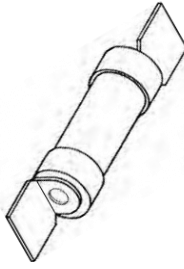
Price List - 2017

BS Fuse link Type SS/NS/ES



Powering Business Worldwide


Clip-on Fuse links with Staggered Tags-415 V AC

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class		
	E1	SMALL CLIP ON TAG	415	2	SS2	50	20	20	O	SSD	
			415	4	SS4	50	20	20	N		
				415	6	SS6	50	20	20		N
				415	10	SS10	50	20	20		O
				415	16	SS16	56	20	20		O
				415	20	SS20	56	20	20		O
	F1	CLIP ON TAG	415	2	NS2	43	20	20	N	NSD	
			415	4	NS4	43	20	20	N		
				415	6	NS6	43	20	20		N
				415	10	NS10	43	20	20		N
				415	16	NS16	51	20	20		N
				415	20	NS20	51	20	20		N
				415	25	NS25	51	20	20		N
				415	32	NS32	51	20	20		N
	F2	LONG CLIP ON TAG	415	2	ES2	72	20	20	O	ESD	
			415	4	ES4	72	20	20	O		
				415	6	ES6	72	20	20		O
				415	10	ES10	72	20	20		O
				415	16	ES16	72	20	20		O
				415	20	ES20	72	20	20		O
			415	25	ES25	75	20	20	O		
			415	32	ES32	75	20	20	O		
			415	36	ES36	76	20	20	O		
			415	50	ES50	98	20	20	N		
		415	63	ES63	101	20	20	N			

N - Normal; O - On Order

BS Fuse link Type EIT.

Fuse link with Offset Tags

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
		OFFSET TAG	415	2	EIT2	70	20	20	O	EITD
		OPEN SLOT	415	4	EIT4	70	20	20	O	
			415	6	EIT6	70	20	20	N	
			415	10	EIT10	70	20	20	N	
			415	16	EIT16	70	20	20	N	
			415	20	EIT20	70	20	20	N	
			415	25	EIT25	81	20	20	N	
			415	32	EIT32	81	20	20	N	
			415	36	EIT36	96	20	20	O	
			415	50	EIT50	96	20	20	O	
			415	63	EIT63	106	20	20	N	

N - Normal; O - On Order

Type - TSA / TSS / TSDS / TSD / TSFP
Fuse link with Offset Tags Closed Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFFSET TAG	415	6	TSA6	54	20	20	O	AAO
		CLOSED SLOT	415	10	TSA10	54	20	20	O	
			415	16	TSA16	54	20	20	N	
			415	20	TSA20	56	20	20	O	
			415	25	TSA25	56	20	20	N	
			415	32	TSA32	56	20	20	N	
	A3	OFFSET TAG	415	36	TSS36	102	20	20	N	BAO
		CLOSED SLOT	415	50	TSS50	102	20	20	N	
			415	63	TSS63	102	20	20	N	
	-	OFFSET TAG	415	80	TSDS80	195	10	10	N	OSD
		CLOSED SLOT	415	100	TSDS100	195	10	10	N	
			415	125	TSDS125	219	10	10	N	
	A4	OFFSET TAG	415	80	TSD80	177	10	10	N	CEO
		CLOSED SLOT	415	100	TSD100	187	10	10	N	
			415	125	TSD125	242	10	10	N	
	-	OFFSET TAG	415	125	TSFP125	271	10	10	O	DEO
		CLOSED SLOT	415	160	TSFP160	271	10	10	N	
		415	200	TSFP200	271	10	10	O		

N - Normal; O - On Order

Type - TSDC \ TSK \ TSMS \ TSTS \ TSLs
Fuse Links with Centre Tag Single Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	Centre Tag	415	80	TSDC80	204	10	10	O	CD
		Single Slot	415	100	TSDC100	204	10	10	N	
	B3	Centre Tag	415	250	TSK250	461	10	10	N	ED
		Single Slot	415	315	TSK315	470	10	10	N	
	C1	Centre Tag	415	355	TSMS355	667	1	1	O	SN11(S)
		Single Slot	415	400	TSMS400	777	1	1	N	
	-	Centre Tag	415	450	TSTS450	888	1	1	O	SP11(S)
		Single Slot	415	500	TSTS500	888	1	1	O	
	-	Centre Tag	415	560	TSLs560	1669	1	1	O	SR11(S)
		Single Slot	415	630	TSLs630	1932	1	1	O	
			415	710	TSLs710	1902	1	1	O	
			415	750	TSLs750	1902	1	1	O	
			415	800	TSLs800	1902	1	1	N	

N - Normal; O - On Order


Price List - 2017

Type - TSM / TST / TSL



Powering Business Worldwide


Fuse link with Offset Tags Double Slot.

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	415	355	TSM355	1042	1	1	O	EF
		Double Slot	415	400	TSM400	1042	1	1	O	
	C2	Centre Tag	415	450	TST450	1122	1	1	O	FF
		Double Slot	415	500	TST500	1122	1	1	O	
	C3	Centre Tag	415	560	TSL560	1669	1	1	O	SR11
			Double Slot	415	630	TSL630	2110	1	1	
			415	710	TSL710	2110	1	1	O	
			415	750	TSL750	2114	1	1	O	
			415	800	TSL800	2129	1	1	N	

N - Normal; O - On Order

Type - TM \ TTM \ TLM


Fuse Links with Centre Tags Double Slot

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	660	355	TM355	1267	1	1	O	SP11
		Double Slot	660	400	TM400	1231	1	1	O	
	C2	Centre Tag	660	450	TTM450	1485	1	1	O	R11
			Double Slot	660	500	TTM500	1485	1	1	
			660	560	TTM560	1740	1	1	O	
	C3	Centre Tag	660	630	TTM630	1808	1	1	O	GF
			Double Slot	660	630	TLM630	2274	1	1	
			660	710	TLM710	2274	1	1	O	
			660	750	TLM750	2274	1	1	O	
			660	750	TLM750	2274	1	1	O	

N - Normal; O - On Order

Type TIA \ TIS \ TCP \ TFP

Fuse with Offset Tags (2 hole fixing - Bolted)

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class			
	A2	OFFSET TAG	660	2	TIA2	60	10	10	O	HO7		
		CLOSED SLOT	660	4	TIA4	60	10	10	O			
			660	6	TIA6	82	10	10	N			
			660	10	TIA10	82	10	10	N			
			660	16	TIA16	82	10	10	N			
			660	20	TIA20	82	10	10	N			
			660	25	TIA25	82	10	10	N			
			660	32	TIA32	82	10	10	N			
		A3	OFFSET TAG	660	36	TIS36	130	10	10		N	KO7
			CLOSED SLOT	660	40	TIS40	130	10	10		O	
			660	50	TIS50	147	10	10	N			
			660	63	TIS63	147	10	10	N			
	A4	OFFSET TAG	660	80	TCP80	256	6	6	N	L14		
		CLOSED SLOT	660	100	TCP100	256	6	6	N			
			660	125	TFP125	445	3	3	O	M14		
			660	160	TFP160	445	3	3	O			
			660	200	TFP200	445	3	3	O			

Type - TC \ TF \ TKF
Fuse with Central Tags

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	B1	CENTRE TAG	660	80	TC80	281	6	6	O
		SINGLE SLOT	660	100	TC100	281	6	6	N
			660	80	102TC80	282	6	6	O
			660	100	102TC100	282	6	6	O
	B3	CENTRE TAG	660	125	TF125	429	3	3	N
		SINGLE SLOT	660	160	TF160	437	3	3	N
			660	200	TF200	442	3	3	N
			660	250	TF250	458	3	3	N
	B3	CENTRE TAG	660	250	TKF250	768	1	1	N
		SINGLE SLOT	660	315	TKF315	768	1	1	N

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit
Type - SC (Safe Clip)

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
E1	-	Front	SS	20	SC20H	415	108	10	10	O
F1	-	Front	NS	32	SC32H	415	-	10	10	O
F2	-	Front	ES	63	SC63H	415	329	10	10	N

N - Normal; O - On Order

Fuse Fittings for LV BS Type of Fuses
Type - NS & SM: Moulded Fuse Holder

IS / BS Size Reference	Tag Type	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
F1		Front	NS (upto 32A)	32	NSH32	415	111	10	10	N
		Back	NS (upto 32A)	32	NSP32	415	158	10	10	N
		Busbar	NS (upto 32A)	32	NSB32	415	137	10	10	N
A2	Offset Bolted	Front	TIA / TSA	32	SM32H	660	257	10	10	N
		Busbar	TIA / TSA	32	SM32B	660	306	10	10	N
A3	Offset Bolted	Front	TIA / TSS	63	SM63H	660	329	10	10	N
		Busbar	TIA / TSS	63	SM63B	660	354	10	10	N
A4	Offset Bolted	Front	TCP / TSD	125	SM125H	660	850	5	10	N
		Busbar	TCP / TSD	125	SM125B	660	860	5	10	N

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
00	-	-	NH00	160	ISG160	500	278	3	3	N
1	-	-	NH1	250	ISG250	660	620	3	3	N
2	-	-	NH2	630	ISG400	660	763	3	3	N
3	-	-	NH3	400	ISG630	660	983	3	3	N

N - Normal; O - On Order

Fuselink for Diode & Thyristor Protection

800 \ 1000 Vac	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
		800	63	GSMJ63	624	3	3
	800	120	GSMJ120	1446	1	1	O
	800	180	GSMJ180	2176	2	2	O
	800	240	GSMJ240	2830	1	1	O
	800	300	GSMJ300	3245	1	1	O
	800	350	GSMJ350	4265	1	1	O
	800	400	GSMJ400	5005	1	1	O
	800	460	GSMJ460	5500	1	1	O
	800	520	GSMJ520	6087	1	1	O
	800	580	GSMJ580	7293	1	1	O
	800	630	GSMJ630	8157	1	1	O
	800	680	GSMJ680	9022	1	1	O
	800	800	GSMJ800	11618	1	1	O
	800	1000	GSMJ1000	14527	1	1	O
	800	1200	GSMJ1200	16562	1	1	O
	1000	63	GSMK63	317	3	3	O
	1000	120	GSMK120	1520	2	2	O
	1000	180	GSMK180	2224	2	2	O
	1000	240	GSMK240	3182	1	1	O
	1000	300	GSMK300	3646	2	2	O
	1000	350	GSMK350	4511	2	2	O
	1000	400	GSMK400	5438	1	1	O
	1000	460	GSMK460	6056	1	1	O
	1000	520	GSMK520	7355	1	1	O
	1000	580	GSMK580	7910	1	1	O
	1000	630	GSMK630	8837	1	1	O
	1000	680	GSMK680	9703	1	1	O
	1000	800	GSMK800	11840	1	1	O
	1000	1000	GSMK1000	-	1	1	O
	1000	1200	GSMK1200	18787	1	1	O
	-	2000	SMK-GSM120-2000	301	1	1	O
	-	400	954GSMJ400	5757	1	1	O
	1000	500	RGS500	4519	1	1	O

N - Normal; O - On Order

Fuse Holder

Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
TI300-BI	-	322	20	20	N
TI600-BI	-	337	20	20	N
TI1200-BI	-	348	20	20	N
TI2000-BI	-	393	20	20	N

N - Normal; O - On Order

High Voltage Fuses

British Standard Type Range of Fuses for use in Motor Circuits

	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	3.6 / 7.2 KV ac	3.6	5	K3PGX5	4070	1	1
3.6		10	K3PGX10	4070	1	1	O
3.6		16	K3PGX16	4070	1	1	O
3.6		20	K3PGX20	4070	1	1	O
3.6		25	K3PGX25	4070	1	1	O
3.6		32	K3PGX32	4070	1	1	O
3.6		40	K3PGX40	4070	1	1	O
3.6		50	K3PGX50	4070	1	1	O
3.6		63	K3PGX63	4080	1	1	O
3.6		80	K3PGX80	4080	1	1	O
3.6		100	K81PEX100	6880	1	1	O
3.6		160	K81PEX160	7715	1	1	N
3.6		200	K81PEX200	8315	1	1	O
3.6		250	K81PEX250	9540	1	1	N
3.6		315	K81PEX315	11325	1	1	O
3.6		350	K81PEX350	12725	1	1	N
7.2		50	K81SVX50	8615	1	1	O
7.2		63	K81SVX63	8615	1	1	N
7.2		80	K81SVX80	9390	1	1	N
7.2		100	K81SVX100	10490	1	1	N
7.2		125	K81SVX125	11425	1	1	N
7.2		160	K81SVX160	11425	1	1	O
7.2		200	K81SVX200	13100	1	1	O
7.2		250	K81SVX250	16090	1	1	O
7.2		50	KSVX50	8940	1	1	O
7.2		63	KSVX63	8940	1	1	O
7.2		80	KSVX80	8940	1	1	O
7.2		100	KSVX100	8940	1	1	O
7.2		125	KSVX125	8940	1	1	O
7.2		160	KSVX160	10030	1	1	O
7.2		200	KSVX200	11225	1	1	O
7.2		250	KSVX250	12720	1	1	O

N - Normal; O - On Order

Cross Reference Chart

LV BS FUSES

Clip on Type

BS Size	Bussmann	Bussmann
E1	SSD	SS
F1	NSD	NS
F2	ESD	ES

Bolted Type - 550V Range

BS Size	Bussmann	Bussmann*
A1	NITD	NIT
A2	AAO	TSA
A3	BAO*	TSS
A4	CEO	TSD
-	OSD	TSDS
C2	FF	TST
C3	GF	TLM
-	GG	TLT

*Fuses are 415V rated

Bolted Type - 660V Range

BS Size	Bussmann	Bussmann
A2	HO7-660	TIA
A3	KO7-660	TIS
A4	L14-660	TCP
-	M14-660	TFP
B1	LO9-660	TC
B2	MO9-660	TF
B3	NO9-660	TKF
B4	PO9-660	TMF
C1	P11-660	TM
C2	R11-660	TTM

Bolted Type - 415V Range

BS Size	Bussmann	Bussmann
-	EITD	EIT
-	DEO	TSFP
B1	CD	TSDC
B2	DD	TSF
B3	ED	TSF/TSK
B4	ED	TSK/TSM
-	SN11(S)	TSMS
-	SP11(S)	TSTS
-	SR11(S)	TSL
C1	EF	TSM
-	SR11	TSL

HIGHSPEED BS88 FUSES

Bussmann		Bussmann		Brand 4	
TYPE	RANGE	TYPE	RANGE	TYPE	RANGE
240 Volts Range					
LCT	6-20	GSA	5-20	2.5URE	6-20
LET	25-180	GSA	25-100	2.5URGS/URZ	25-100
LMT	160-450	GS450	150-250	2.5URGG	150-250
LMT	160-450	GS450	300-500	2.5URGH	300-500
LMMT	400-900	--	--	--	--
690 Volts Range					
CT	6-20	GSB	5-20	6.6URE	6-20
ET	25-80	GSB	25-75	6.6URS	25-75
ET	25-80	GSG1000	16-55	6.6URS	16-55
EET	90-160	GSG1000	75-150	6.6URT	75-140
FM	180-350	GS1000	100-200	6.6URGL/UR	100-250
MT	160-355	GS1000	100-200	6.6URGL/UR	100-250
MMT	180-710	GS1000	300-500	--	--
MMT	180-710	GSG1000	175-350	6.6URGM/URU	175-350

HV FUSES

Appl. used in	Bussmann	Bussmann	Appl. used in	Bussmann	Bussmann
Air	ADGHC	H2CAS	VT/PT	ABCNS	5xVTF
Air	ADOH6 / ADOH7	K3PGX	Motor Ckt.	WDOHS	K3PGX
Air	BFGHD	H2CAS	Motor Ckt.	WDFMO / WFFMO	K81PEX / K81PRX
Air	BDGHC	H2CAS	Motor Ckt.	WKFMO	K82PEX
Air	AHGHC	H2CAS	Motor Ckt.	WQFMO	K81SVX / K81SRX
Oil	OHGMA/OLGMA	KEMXO	Motor Ckt.	WKQMO	K82SSX
Oil	OEFMA/OHFMA	KEBXO			
VT/PT	ABWNA	VTF			
VT/PT	ABCNA	VTF			

LV NH DIN FUSES

Size as per IEC	Bussmann	Bussmann	Brand 2	Brand 3
400 / 415 Volts				
SIZE C00/000	NHG000B-400	NA	NA	
SIZE 00	NHG00B-400	NA	NA	HNSIZE00
SIZE 1	NHG01-400 / NHG1-400	NA	NA	HN SIZE1
SIZE 2	NHG02-400 / NHG2-400	NA	NA	HN SIZE2
SIZE 3	NHG03-400 / NHG3-400	NA	NA	HN SIZE3
500 Volts				
SIZE C00/000	NHG000B	VSA	3NA38	NA
SIZE 00	NHG00B	VSB	3NA10	NA
SIZE 1	NHG01 / NHG1	VSF	3NA12	NA
SIZE 2	NHG02 / NHG2	VSK	3NA13	NA
SIZE 3	NHG03 / NHG3	VST	3NA14	NA
660 / 690 Volts				
SIZE 00	NH00G - 690	NA	NA	NA
SIZE 1	NH1G-690	NA	NA	NA
SIZE 2	NH2G- 690	NA	NA	NA
SIZE 3	NH3G- 690	NA	NA	NA

LV NH DIN Bases

Suitable for Size	Bussmann		Bussmann	Brand 2	Brand 3
	Type	Amps			
C00/000/00	SB 00 - PB	160	ISG160	3NH3030 / 3032	HB 125
01/1	SB 1 - D	250	ISG250	3NH3230	HB 250
02/2	SB 2 - D	400	ISG400	3NH3330	HB 800

LV BS88 Bases

BS Size	Bussmann			Bussmann	Brand 2	Brand 3
	Fuse Types	Type	Amps			
Old Type						
F1	NSD / FO6	FA	32	NSH	NA	HD32H
F1	NSD / FO6	FB	32	NSP	NA	HD32P
F1	NSD / FO6	FD	32	NSB	NA	HD32B
A2	HO7 / AAO / FO7	HA	32	SM32H	NA	HK32H
A2	HO7 / AAO / FO7	HD	32	SM32B	NA	HK32B
A3	TO7 / BAO / KO7	KA	63	SM63H	NA	HK63H
A3	TO7 / BAO / KO7	KD	63	SM63B	NA	HK63B
A4	L14 / CEO / DEO@ / M14@ / KL14	LA	125	SM125H	NA	HK125H
A4	L14 / CEO / DEO@ / M14@ / KL14	LD	125	SM125B	NA	HK125B
New Safeloc Type						
F1	NSD / FO6	NNSF	32	SC32H	3NW 32	NA
F2	ESD	ENSF	63	SC63H	NA	NA
New Range - Cam Master						
A2	HO7 / AAO / FO7	CM32F	32		3NW CM32F9	NA
A3	TO7 / BAO / KO7	CM63F	63		3NW CM63F9	NA
	OSD	CM100F	100		3NW CM100F9	NA

@ - upto 125A only

- ❖ The chart is intended for guidance purpose only, considering physical replacability
- ❖ In identical operating condition, Bussmann fuse can be used to achieve similar performance.
- ❖ Other makes may not necessarily have identical performance. Relevant data like rated voltage, breaking capacity, let thru' current, etc also need to be evaluated while evaluating fuse performance.

Bussmann® by Eaton Products And Technical Expertise Delivered Worldwide

Customer Assistance

Customer Satisfaction Team

Bussmann by Eaton India Customer Satisfaction Team is available in Pondicherry to answer questions regarding Bussmann by Eaton products Sales, Supply and Services. Calls should be made between 9.00 am - 5.30pm IST.

- Phone : +91 413 267 2015/ 2018
- Fax : +91 413 267 8182
- E-mail : giridharans@eaton.com

Application Engineering

Application Engineering and selection assistance is available to all customers. This team is staffed by subject matter expert, electrical application engineers and available Monday - Friday 9.00am - 5.30pm IST.

- E-mail : technicalhelpindia@eaton.com

Regional Contacts

Ahmedabad : +91 98793 55485	Chandigarh : + 91 95011 77119
Bangalore : +91 98451 75290	Kolkata : +91 94330 07468
Chennai : + 91 98403 26095	Mumbai : +91 98204 32943
Coimbatore : + 91 93448 93165	Delhi : + 91 98110 86586
Hyderabad : +91 9533423461	Pune : +91 93265 06988

Regional E-mails

For E-mail, prefix cityname to bussmann____@eaton.com
Example, for Delhi, write - bussmann**delhi**@eaton.com

Webservices

www.cooperbussmann.com/1/technicalinformation.html

Cooper Bussmann website offers free information & resources that include:

- Products data sheets and complete technical information.
- Latest European & US Catalogues.
- Safety BaSICS™ for the essentials of electrical safety.
- Training modules for increasing skill levels of customers and end users.
- Cross referencing to find the correct Cooper Bussmann replacement for a competitor's fuse.

Your Authorised by Eaton Distributor is :