



Switch to the best.. Gen Next Pro LED Indicator

- Best in class illumination
- SMD LED cluster technology
- Inbuilt Low Voltage Glow Protection
- Terminals designed to accomodate 2 lugs of 2.5 sq. mm each

Customer Interaction Center (CIC)

BSNL / MTNL (toll-free): 1800 233 5858 Reliance (toll-free): 1800 200 5858
Tel: 022 6774 5858 Email: cic@Lntebg.com Web: www.Lntebg.com

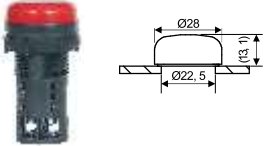

Modular Remote Control Units

Note: All Cat.No. to be ordered in multiple of Standard Packing : 10, Except for Push Button Stations.

Gen Next Series

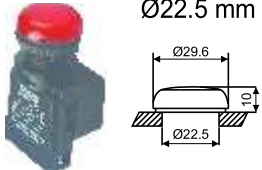
Gen Next LED Indicator [8531]

- Surface Mounted Device LED technology
- Low Power consumption < 1W
- Surge & Low Voltage Glow Protection (LVGP)

Gen Next Pro Ø22.5 mm in Cluster design	Description	Cat. No.	Colour (4 th Digit)	Voltage (5 th , 6 th , 7 th & 8 th Digit)	M.R.P. (₹) Per Unit
	Gen Next Pro LED Indicator 22.5 mm	EPL□□□□□	R-Red G-Green Y-Yellow A-Amber B-Blue W-White	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	117 201 Blue & White
				415A - 415 VAC	146 249 Blue & White
	Gen Next LED Indicator 16 mm	SIL□□□□□	R-Red G-Green Y-Yellow A-Amber B-Blue W-White	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110C - 110 VAC/DC 240A - 240 VAC	131 220 Blue & White

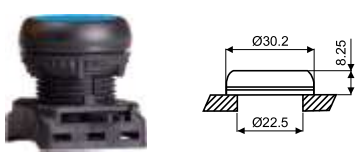
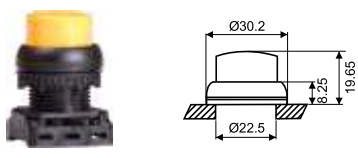
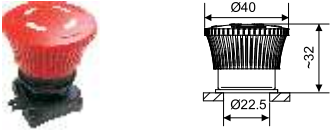
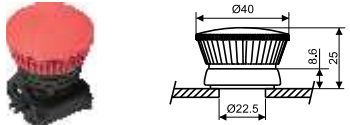
Note * - LED Indicator for Flame Proof Panel application available on request.

Gen Next Universal LED Indicator [8531]































Ø22.5 mm	Description	Cat. No.	Colour (8 th Digit)	Voltage (9 th , 10 th , 11 th & 12 th Digit)	M.R.P. (₹) Per Unit
	Gen Next Universal Voltage LED indicator	EG0100L□□□□□	R-Red G-Green Y-Yellow A-Amber B-Blue W-White	224C-24 to 240V AC/DC 424C-40 to 240V AC/DC	351 421 Blue & White

Gen Next Push Button & Selector Actuators Ø 22.5 mm [8538]

- Snap Mounting with compact contact blocks (EC1C & EC2C)
- Max 3 row x 3 column stackable contact blocks

	Description	Cat. No.	Colour (4 th Digit)	M.R.P. (₹) Per Unit
	Flush Head	EMN□FD1	R-Red G-Green C-Black Y-Yellow W-White B-Blue A-Amber F-Gray	74
	Projecting Head Push Function	EMN□PD1	R-Red G-Green C-Black Y-Yellow W-White B-Blue A-Amber F-Gray	75
	Mushroom Head 'Push - Turn Function'	EMN□MH1	R-Red G-Green C-Black Y-Yellow	146
	Mushroom Head 'Push - Function'	EMN□MD1	R-Red G-Green C-Black Y-Yellow	106



Gen Next Push Button & Selector Actuators Ø 22.5 mm [8538]

	Description	Cat. No.	Colour (4 th Digit)	M.R.P. (₹) Per Unit
 	Symmetric Head	2 Position  Non Spring Return EMN□SK1	R-Red G-Green C-Black W-White	209
		 Spring Return EMN□SI1		
		3 Position  Non Spring Return EMN□SL1		220
		 Spring Return EMN□SJ1		
		 Spring Return L. H. EMN□SM1		
		 Spring Return R. H. EMN□SN1		
 	Lever Head	2 Position  Non Spring Return EMN□LK1	R-Red W-White C-Black	209
		 Spring Return EMN□LI1		
		3 Position  Non Spring Return EMN□LL1		220
		 Spring Return EMN□LJ1		
		 Spring Return L. H. EMN□LM1		
		 Spring Return R. H. EMN□LN1		
 	Lock & Key Rotary Type	2 Position  Non Spring Return EMN□KK1	C-Black	300
		 Spring Return EMN□KI1		
		3 Position  Non Spring Return EMN□KL1		314
		 Spring Return EMN□KJ1		
		 Spring Return L. H. EMN□KM1		
		 Spring Return R. H. EMN□KN1		
 	Push Pull	EG02MG0□	R-Red	290
 	Mushroom Head Lock And Key Actuator	EG02MQ0R00	R-Red	327
 	Twin Touch with Black centre strip	EG02TD0I	-	149

Note :













1. Actuators & Selector Actuators with black ABS collar are offered as Standard
2. Actuators (except Mushroom Head Push - Pull Actuators) are also available with chrome plated ABS & Brass collar
 Non-Illuminated Actuator
 - For PU Coated ABS Collar replace 7th digit 1 by 2 eg. : **EMNPD2**
 - For Brass Metal Collar replace 7th digit 1 by 3 eg. : **EMNPD3** (Please contact nearest branch office for MRP)
 Illuminated Actuator
 - For PU Coated ABS Collar replace 4th digit 3 by 5 eg. : **EG05*****
 - For Brass Metal Collar replace 4th digit 3 by 7 eg. : **EG07***** (Please contact nearest branch office for MRP)



Brass Metal Collar Push Button

Note * - In 2 position selector actuator, for operating style  replace 6th digit from K to R and for operating style  replace 6th digit from K to T



Gen Next Illuminated Push Button Actuators [8531]

- Snap Mounting with compact contact blocks (EC1C & EC2C)


	Description	Cat. No.	Colour (8 th Digit)	Voltage (9 th , 10 th , 11 th & 12 th Digit)	M.R.P. (₹) Per Unit
 	Flush Head	EG03FDL□□□□□	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	212
			B-Blue W-White	110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	392 Blue and White
 	Projecting Head (Push Function)	EG03PDL□□□□□	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	212
			B-Blue W-White	110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	392 Blue and White
 	Selector Actuator with LED holder	2 Position		R-Red G-Green Y-Yellow A-Amber B-Blue W-White	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC
		 Non Spring Return EG03SKL□□□□□	311		
		 Spring Return EG03SIL□□□□□	464 Blue and White		
		3 Position			
 Non Spring Return EG03SLL□□□□□	464 Blue and White				
 Spring Return EG03S JL□□□□□					
 	Twin Touch with Led Holder	EG03TDL□□□□□	Y- Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	266

Note* : 1) In 2 position selector actuator, for operating style  replace 6th digit from K to R and for operating style , replace 6th digit from K to T.
2) Assembly comes with LED holder. Please order contact block EC1C and EC2C separately.

Gen Next Modular Contact Blocks [8538]

	Description	Cat. No.	Colour	Voltage	M.R.P. (₹) Per Unit
 	'NO' Block	EC1C	-	-	57
	'NC' Block	EC2C	-	-	57

Spares for Gen Next Series [8531]

	Description	Cat. No.	Colour (8 th Digit)	Voltage (9 th , 10 th , 11 th & 12 th Digit)	M.R.P. (₹) Per Unit
	LED Holder for Gen Next illuminated actuator series	EG08HOL□□□□□	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 030C - 30 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	154
			B-Blue W-White	110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	310 Blue and White








Note : Gen Next Modular Contact Blocks (EC1C and EC2C) can be used only with Gen Next Push Button Actuator



Gen Next Integral Actuator [8536]

- With inbuilt contact arrangement
- Contact rating 6A @ 240AC

	Description	Cat. No.	Contact Configuration (3 rd Digit)	Colour (4 th Digit)	M.R.P. (₹) Per Unit
 	Flush Head	EE□□FD1	1 - 1 NO 2 - 1 NC	R-Red G-Green Y-Yellow	113
			3 - 1 NO + 1 NC 4 - 2 NO 5 - 2 NC	W-White B-Blue A-Amber C-Black	166
 	Projecting Head Push Function	EE□□PD1	1 - 1 NO 2 - 1 NC	R-Red G-Green Y-Yellow	113
			3 - 1 NO + 1 NC 4 - 2 NO 5 - 2 NC	W-White B-Blue A-Amber C-Black	166
 	Mushroom Head Push - Turn	EE□□MH1	1 - 1 NO 2 - 1 NC	R-Red G-Green Y-Yellow	167
			3 - 1 NO + 1 NC 4 - 2 NO 5 - 2 NC	C-Black	227
 	Mushroom Head Push - Function	EE□□MD1	1 - 1 NO 2 - 1 NC	R-Red G-Green Y-Yellow	141
			3 - 1 NO + 1 NC 4 - 2 NO 5 - 2 NC	C-Black	193
 	Symmetric Head Actuator	2 Position  Non Spring Return EE□□SK1	1 - 1 NO 2 - 1 NC	R-Red G-Green W-White C-Black	230
		 Spring Return EE□□SI1	3 - 1 NO + 1 NC (Left NO) 4 - 2 NO 5 - 2 NC 6 - 1 NO + 1 NC (Right NO)		283
		3 Position  Non Spring Return EE□□SL1	3 - 1 NO + 1 NC (Left NO) 4 - 2 NO 5 - 2 NC 6 - 1 NO + 1 NC (Right NO)		292
		 Spring Return EE□□SJ1			
		 Spring Return L. H. EE□□SM1			
		 Spring Return R. H. EE□□SN1			
 	Lever Head	2 Position  Non Spring Return EE□□LK1	1 - 1 NO 2 - 1 NC	R-Red G-Green W-White C-Black	230
		 Spring Return EE□□LI1	3 - 1 NO + 1 NC (Left NO) 4 - 2 NO 5 - 2 NC 6 - 1 NO + 1 NC (Right NO)		283
		3 Position  Non Spring Return EE□□LL1	3 - 1 NO + 1 NC (Left NO) 4 - 2 NO 5 - 2 NC 6 - 1 NO + 1 NC (Right NO)		292
		 Spring Return EE□□LJ1			
		 Spring Return L. H. EE□□LM1			
		 Spring Return R. H. EE□□LN1			


Gen Next Integral Actuator [8536]

	Description	Cat. No.	Contact Configuration (3 rd Digit)	Colour (4 th Digit)	M.R.P. (₹) Per Unit	
	Lock & Key Rotary Type	2 Position		1 - 1 NO 2 - 1 NC	C-Black	294
		 Non Spring Return EE□□KK1	EE□□KK1			
		 Spring Return EE□□KI1		EE□□KI1		
		3 Position				3 - 1 NO + 1 NC (Left NO) 4 - 2 NO 5 - 2 NC 6 - 1 NO + 1 NC (Right NO)
		 Non Spring Return EE□□KL1	EE□□KL1			
		 Spring Return EE□□KJ1		EE□□KJ1		
	 Spring Return L. H. EE□□KM1	EE□□KM1				
 Spring Return R. H. EE□□KN1	EE□□KN1					

Note * - In 2 position selector actuator, for operating style  replace 6th digit from K to R and for operating style  replace 6th digit from K to T





Panel Mounted Buzzer Ø 22.5 mm [8531]

- IP20 protection
- 80dB at 1 m distance
- Low Power consumption < 0.6W








	Description	Electrical Rating	Cat. No.	M.R.P. (₹) Per Unit	
	22.5 mm Panel Mounted Buzzer Black colour		240 VAC	EG15R00C240A	263
			110 VAC	EG15R00C110A	263
			64 VAC/DC	EG15R00C064C	263
			48 VAC/DC	EG15R00C048C	263
			30 VAC/DC	EG15R00C030C	263
			24 VAC/DC	EG15R00C024C	263
			12 VAC/DC	EG15R00C012C	263

Gen Next Push Button Stations [8536]

- Dimension
- Single Station : 65 x 55 x 33 mm
 - Two Station : 100 x 55 x 53 mm
 - Three Station : 134 x 55 x 53 mm
 - Eight Station : 305 x 55 x 53 mm

	Description	Cat. No.	M.R.P. (₹) Per Unit
	Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC'	EP1FAC01	430
Flush Head Actuator - Green with Legend - START Contact - 1 'NO'	EP1FAB02	430	
	Two Position Symmetric Head Selector Switch - Black with Legend - OFF / ON Contact - 1 'NO'	EP1FAF08	565
	Two Position Lock & Key Rotary Switch with Legend - OFF / ON Contact - 1 'NO'	EP1FAF12	625
	Mushroom Head Actuator 'Push Function' with Legend - STOP Contact - 1 'NC' for Stop	EP1FAC03	457

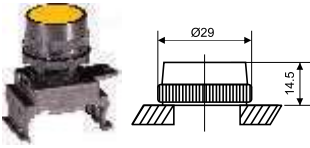
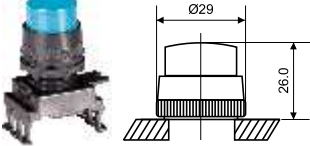
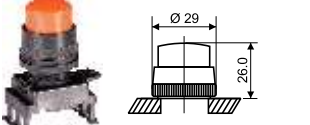
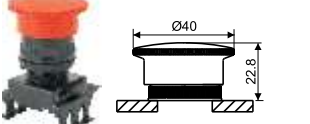
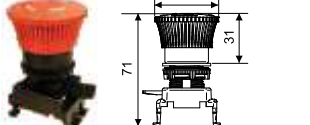
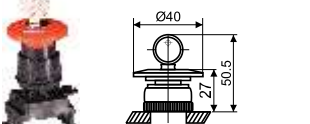
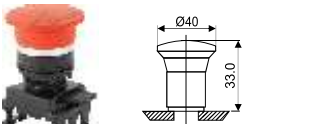
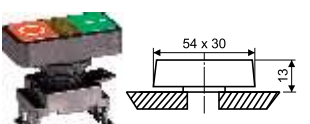







Gen Next Push Button Stations [8536]

	Description	Cat. No.	M.R.P. (₹) Per Unit
	Mushroom Head Actuator 'Push Turn Type' with Legend - STOP Contact - 1 'NC' for Stop	EP1FAC05	557
	Flush Head Actuator - Green with Legend - START Contact - 1 'NO' (Station One)	EP2FAH0201	625
	Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC'		
	Flush Head Actuator - Green with Legend - START Contact - 1 'NO' (Station One)	EP2FAH0205	690
	Mushroom Head Actuator 'Push Turn Type' with Legend - STOP Contact - 1 'NC' (Station Two)		
	LED Indicator 240 VAC - Red (Station One)	EP3FAUI1X0201	842
	Flush Head Actuator - Green with Legend - START Contact - 1 'NO' (Station Two)		
	Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC' (Station Three)		
	Flush Head Actuator - Green with Legend - FORWARD Contact - 1 'NO' (Station Two)	EP3FAR020102	789
	Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC' (Station Two)		
	Flush Head Actuator - Green with Legend - REVERSE Contact - 1 'NO' (Station Three)		
	Flush Head Actuator - Green with Legend - UP Contact - 1 'NO' (Station Two)	EP3FAS020102	789
	Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC' (Station Two)		
	Flush Head Actuator - Green with Legend - DOWN Contact - 1 'NO' (Station Three)		
	All 7 Flush Head Actuators with NO Contact & Mushroom Head Push Turn	EP8F02	2238
	8 Way push button pendant with hanging provision	EP8F04	2395
	Single Station Enclosure Box without Actuator	EP1FAA ^{\$}	238
	Two Station Enclosure Box without Actuator	EP2FAA ^{\$}	252
	Three Station Enclosure Box without Actuator	EP3FAA ^{\$}	260
	Eight Station Enclosure Box without Actuator	EP8FAA ^{\$}	435

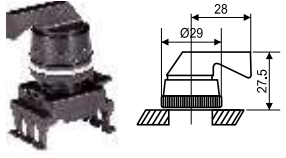






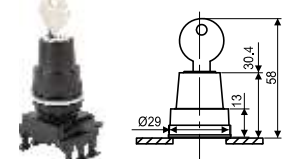






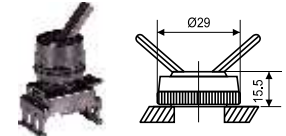

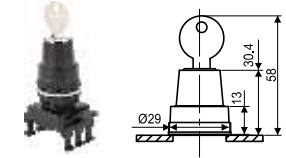

- Note: 1. All Gen next push button stations contains integral Actuators.
2. Only integral actuators can be used for converting Gen next enclosure boxes into Gen Next push button station.
3. For any other combination of actuators/indicators in push button stations please contact nearest branch office.
4. EP8F04 is available in single speed for crane application.
\$ Chapter ID : 8538.



Standard Push Button & Selector Actuators Ø 22.5 mm [8538]

- Contact blocks HC61A2 & HC61B2

	Description	Cat. No.	Colour (6 th Digit)	M.R.P. (₹) Per Unit	
	Flush Head	HD15C□	1-Red 2-Green 3-Black 4-Yellow 5-White/Opal 6-Blue 7-Orange 8-Colorless	101	
	Projecting Head 'Push Function'	HD45C□	1-Red 2-Green 3-Black 4-Yellow 5-White/Opal 6-Blue 7-Orange 8-Colorless	101	
	Projecting Head 'Push - Push Function'	HF45C□	1-Red 2-Green 3-Black 4-Yellow 5-White/Opal 6-Blue 7-Orange	220	
	Mushroom Head Ø 40 mm 'Push Function'	HD55C□	1-Red 2-Green 3-Black 4-Yellow	139	
	Mushroom Head 'Push Turn'	HH55C□	1-Red 2-Green 3-Black 4-Yellow	190	
	Mushroom Head With Lock & Key	HQ55C□	1-Red 2-Green 3-Black 4-Yellow	367	
	Mushroom Head 'Push Pull'	HG55B□	1-Red 2-Green 3-Black 4-Yellow 6-Blue	337	
	Twin Touch	HD15G□	3-Black	197	
	Symmetric Head	2 Position		1-Red 2-Green 3-Black 5-White/Opal	
Non Spring Return			HK65C□		270
Spring Return			HI65C□		
3 Position		287			
Non Spring Return					HL65C□
Spring Return					HJ65C□
Spring Return from L. H.					HM65C□
Spring Return from R. H.			HN65C□		

Standard Push Button & Selector Actuators Ø 22.5 mm [8538]

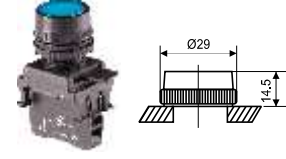
	Description	Cat. No.	Colour (4 th Digit)	M.R.P. (₹) Per Unit	
	Lever Head	2 Position		1-Red 3-Black 5-White/Opal	270
		Non Spring Return	 HK75C□		
		Spring Return	 HI75C□		
		3 Position			287
		Non Spring Return	 HL75C□		
		Spring Return	 HJ75C□		
		Spring Return from L. H.	 HM75C□		
Spring Return from R. H.	 HN75C□				
	Lock & Key Rotary Type	2 Position		3-Black	367
		Non Spring Return	 HK85C□		
		Spring Return	 HI85C□		
		3 Position			386
		Non Spring Return	 HL85C□		
		Spring Return	 HJ85C□		
		Spring Return from L. H.	 HM85C□		
Spring Return from R. H.	 HN85C□				
	Tip Head	2 Position		1-Red 2-Green 3-Black 4-Yellow 5-White/Opal	226
		Non Spring Return	 HP95C□		
	Lock & Key Push Turn	2 Position		3-Black	386
		Non Spring Return	 HH85C□		

Note * - In 2 position selector actuator, for operating style  replace 2nd digit from K to R and for operating style  replace 2nd digit from K to T
 ** For Lock & Key, Key removable position Left, Right or Both


- Note :**
1. Actuators & Selector Actuators with black ABS collar are offered as Standard eg. : **HD15 □1**
 2. Actuators (except Mushroom Head Push - Pull & all types of twin touch Actuators) are also available with PU Coated ABS & Brass collar
 - For PU Coated ABS Collar replace 5th digit C by A eg. : **HD15 □A1**
 - For Brass Chrome plated ABS Collar replace C by B eg. : **HD15 □B1**
 3. For Non-Illuminated Actuator / Selector Actuator at least 1 NO or NC Block required to make a complete Assembly eg. HD15C1 + HC61A2 makes complete assembly of flush head actuator with 1 NO Block



Standard Illuminated Actuators With LED [8531]

- Illuminated Actuators Pre-assembled with LED Holder
- Contact blocks HC61A2 & HC61B2



	Description	Cat. No.	Colour (4 th Digit)	Voltage (5 th , 6 th , 7 th & 8 th Digit)	M.R.P. (₹) Per Unit
	Flush Head	EAL□□□□FD1	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC	258
			B-Blue W-White	240A - 240 VAC 220D - 220 VDC	489

Standard Illuminated Actuators With LED [8531]

	Description	Cat. No.	Colour (4 th Digit)	Voltage (5 th , 6 th , 7 th & 8 th Digit)	M.R.P. (₹) Per Unit
	Projecting Head (Push Function)	EAL□□□□PD1	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC	258
			B-Blue W-White	240A - 240 VAC 220D - 220 VDC	489
	Projecting Head (Push - Push Function)	EAL□□□□PF1	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC	376
			B-Blue W-White	240A - 240 VAC 220D - 220 VDC	606
	Twin Touch	EAL□□□□TD1	Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	338
	Selector Actuator with Gen Next LED	2 Position Non Spring Return  EAL□□□□SK1	R-Red G-Green Y-Yellow A-Amber	012C - 12 VAC/DC 024C - 24 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	408
		2 Position Spring Return  EAL□□□□SI1	B-Blue W-White		606
		3 Position Non Spring Return  EAL□□□□SL1	R-Red G-Green Y-Yellow A-Amber		427
		3 Position Spring Return  EAL□□□□SJ1			
		3 Position Spring Return from L. H.  EAL□□□□SM1	B-Blue W-White		626
		3 Position Spring Return from R. H.  EAL□□□□SN1			

Note* : 1) In 2 position selector actuator, for operating style  replace 10th digit from K to R and for operating style  replace 10th digit from K to T.
 2) Assembly comes with LED holder. Please order contact block HC61A2 and HC61B2 separately.
 3) For Illuminated Actuators / Selector Actuators at least 1 LED Holder is required for electrical connection.

Standard Modular Contact Blocks

	Description	Cat. No.	Colour (4 th Digit)	Voltage (5 th , 6 th , 7 th & 8 th Digit)	M.R.P. (₹) Per Unit
 [8538]	'NO' Block	HC61A2	-	-	76
	'NC' Block	HC61B2	-	-	76
 [8531]*	LED Holder for Standard series	EHL□□□□□	R-Red G-Green Y-Yellow A-Amber B-Blue W-White	012C - 12 VAC/DC 024C - 24 VAC/DC 048C - 48 VAC/DC 064C - 64 VAC/DC 110A - 110 VAC 110D - 110 VDC 240A - 240 VAC 220D - 220 VDC	157 367 Blue & White

Universal Push Button Stations (in ABS Engineering plastic body) [8536]

Dimension ● Single Station : 75 x 75 x 56 mm ● Two Station : 127 x 75 x 56 mm
● Three Station : 160 x 75 x 56 mm

	Description	Cat. No.	M.R.P. (₹) Per Unit
	Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC'	EWS1C01AC062	520
	Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO'	EWS1C01AC063	520
	Two Position Symmetric Head Selector Switch - Black with Laser Marking - OFF / ON Contact - 1 'NO'	EWS1C01AF064	687
	Illuminated Actuator - Green with Laser Marking - ON Contact - 1 'NO' - 240 VAC	EWS1C01AA070	613
	Two Position Lock & Key Rotary Switch with Laser Marking - OFF / ON Contact - 1 'NO'	EWS1C01AF065	777
	Mushroom Head Actuator 'Push Function' with Laser Marking - STOP Contact - 1 'NC' for Stop	EWS1C13AC054	553
	Mushroom Head Actuator 'Push Turn type' with Laser Marking - STOP Contact - 1 'NC' for Stop	EWS1C13AC051	624
	"Mushroom Head Actuator with Lock and Key on Yellow Cover, with Laser Marking - STOP, Contact - 1 'NC' for Emergency Stop"	EWS1C13AC066	760
	Push Button Station with Push Pull Emergency Switch, Red with 1 NC	EWS1C13AC069	675
	Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station One) Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Two)"	EWS2C01AH045	751
	Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station One) Mushroom Head Actuator 'Push Turn Type' with Laser Marking - TOP Contact - 1 'NC'"	EWS2C01AH067	833
	Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station One) Mushroom Head Actuator 'Lock & Key Type' with Laser Marking - STOP Contact - 1 'NC'"	EWS2C01AH068	983
	Pilot Light 240 VAC White (Station One) Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station Two) Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Three)"	EWS3C01AH048	1018
	Flush Head Actuator - Green with Laser Marking - FORWARD Contact - 1 'NO' (Station One) Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Two) Flush Head Actuator - Green with Laser Marking - REVERSE Contact - 1 'NO' (Station Three)"	EWS3C01BJ055	954
	Flush Head Actuator - Green with Laser Marking - UP Contact - 1 'NO' (Station One) Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Two) Flush Head Actuator - Green with Laser Marking - DOWN Contact - 1 'NO' (Station Three)"	EWS3C01AS055	954

Universal Push Button Stations (in ABS Engineering plastic body) [8538]


Push Buttons Station Enclosure

- Dimension
- Single Station : 75 x 75 x 56 mm
 - Two Station : 127 x 75 x 56 mm
 - Three Station : 160 x 75 x 56 mm
 - Four Station : 215 x 75 x 70 mm
 - Five Station : 270 x 75 x 71 mm

	Description	Cat. No.	M.R.P. (₹) Per Unit
	Enclosure Grey-Black single hole	EWS1C01AA	302
	Enclosure Grey-Black & 2 hole of Ø 22.5	EWS2C01AA	392
	Enclosure Grey-Black & 3 holes of Ø 22.5	EWS3C01AA	480
	Enclosure Grey-Black & 4 holes of Ø 22.5	EWS4C01AA	676
	Enclosure Yellow-Black single hole	EWS1C13AA	302
	Enclosure Yellow-Black & 2 hole of Ø 22.5	EWS2C13AA	392
	Enclosure Yellow-Black & 3 holes of Ø 22.5	EWS3C13AA	480
	Enclosure Yellow-Black & 4 holes of Ø 22.5	EWS4C13AA	676
	Enclosure Yellow-Black & 5 holes of Ø 22.5	EWS5C13AA	779


Standard All Purpose Enclosures [8538]

Dimension: 110 x 80 x 65 mm


 <p>Note : with plastic screws</p>	Description	Cat. No.	M.R.P. (₹) Per Unit
	All Grey without hole	HF999000	295
	All Grey & 1 hole of Ø 22.5	HF999001	295
	All Grey & 2 holes of Ø 22.5	HF999002	295





Note: All series actuators and contact block can be used to convert all purpose enclosure box into standard push button station.


Accessories and Spares [8538]


Metal Plates - Spare	Description	Cat. No.	M.R.P.(₹) Per Unit
	Small	HH2420122	18
	Large	HH2420124	18
	Square	HH2420123	18

Note: Printing as per customer requirement

Fixing Device	Cat. No.	M.R.P. (₹) Per Unit
	HH192000	64

Plastic Plate	Cat. No.	M.R.P. (₹) Per Unit
 Yellow legend plate	HB135000	54
 Padlock Yellow (for Mushroom head Actuator)	HF192024	135
 Padlock Transparent (for Flush head Actuator)	HF192025	123
 Protecting Shroud for Emergency Push Button	HF195020A	62
Protecting Shroud	HF195004	54




Shroud (Boot) for Actuator	Colour	Standard Actuator		Gen Next Actuator	
		Cat. No.	M.R.P. (₹) Per Unit	Cat. No.	M.R.P. (₹) Per Unit
 (For IP67 protection of actuators)	White	NA	NA	HB17101	25
	Red	HH152002	22	HB17301	
	Green	HH153003		HB17401	
	Black	HH154004		NA	
	Yellow	HH155005		HB17501	
	Blue	NA	NA	HB17701	30
	Amber	NA	NA	HB17801	
	Colourless	HH150100	30	HB190003	

Spare Lens Cap	Colour	Cat. No.		M.R.P. (₹) Per Unit
		Non Illuminated	Illuminated	
	Red	HB103002	HB103103	17
	Green	HB104000	HB104101	
	Black	HB102006	NA	
	Yellow	HB105008	HB105109	
	White/Opal	HB101004	HB101105	
	Blue	HB107010	HB107111	
	Orange	HB108012	HB108113	
	Colourless	NA	HB100107	

Note: It can be used for Gen Next as well as standard actuators.

Collar (For Flush/Projecting Head)	Cat. No.	Colour	M.R.P. (₹) Per Unit
 Adaptor Ring * (For 30 to 22 mm in Panel Cutout conversion)	HB192000	Black	16
	HB326000	Brass	52
	HH180000	Gray	23
HH182004	Black		
HH196006	Chrome Plated 'ABS'		
 Blanking Plugs	HH180002	Gray	44
	HH182009	Black	
	HH196010	Chrome Plated 'ABS'	
 Center Indication Strip (For Twin Touch Actuator)	HB102058	Black	44
	HB105163	Yellow	
	HB108169	Orange	
	HB100161	Colourless	

* It can be used to convert Gen Next actuator series to TK3 Ø30 mm mounting.

Clips for Modular Blocks	Description	Cat. No.	M.R.P. (₹) Per Unit	Clips for Modular Blocks	Description	Cat. No.	M.R.P. (₹) Per Unit
	Second Row Clip (For Vertical Cascading)	HC122030	25		First Row Clip	HC922002	25
	Side Row Clip (For Horizontal Cascading)	HC929002				Single Leg Clip	

Note: First Row Clip is included for all std series Push Button Actuators, Selector Actuators & Mushroom Head Assembly

Disclaimer for Modular Remote Control Unit

Every effort as to the correctness or sufficiency of the information and data contained in the catalogue is made. We however cannot accept any liability for the accuracy or completeness of the information and data provided. No claims in this regard shall consequently be accepted.

We reserve the right to make changes, without prior notice, in the catalogue.

Products with CAT no. having, with or without, dot as suffix are same.

These products are manufactured by

